ALL BATTERIES RANGES

AGM VRLA


FLB


SLA


FIT


FHT

FIAMM AGM batteries have optimized internal gas recombination and are maintenance free without topping up. They are non-spillable, non-harzardous for transportation and 100% recyclable.

AGM VRLA SSLA


FG


FGH


FGC


FGHL


FGL

The SSLA battery range has been designed to cover a wide range of applications. The footprint of products are ideal for critical installations.
Connection is simple on smaller models sizes thanks to the easy ‘fast-on’ terminals.

GEL VRLA


SMG 12V


SMG OPzV


SMG Solar


RES2

FIAMM GEL batteries are maintenance free and combine the benefits of a gelled electrolyte which provides a longer life and wider temperature operating range.

FLOODED


LM OPzS


LM Solar


SD SDH


SGL SGH

FIAMM vented batteries are available for several discharge profiles and for applications with unstable grid and deep discharge rate.
Minimun maintenance and topping up are required.


FIAMM

Headquarters
FIAMM Energy Technology S.p.A.
Viale Europa, 75
36075 Montecchio Maggiore (VI) - Italy
Tel. +39 0444 709311
Fax +39 0444 694178

A Hitachi Group Company

info.standby@fiamm.com
www.fiamm.com

fiamm.batteries
fiammbatteries
youtube.com/user/FIAMMvideo

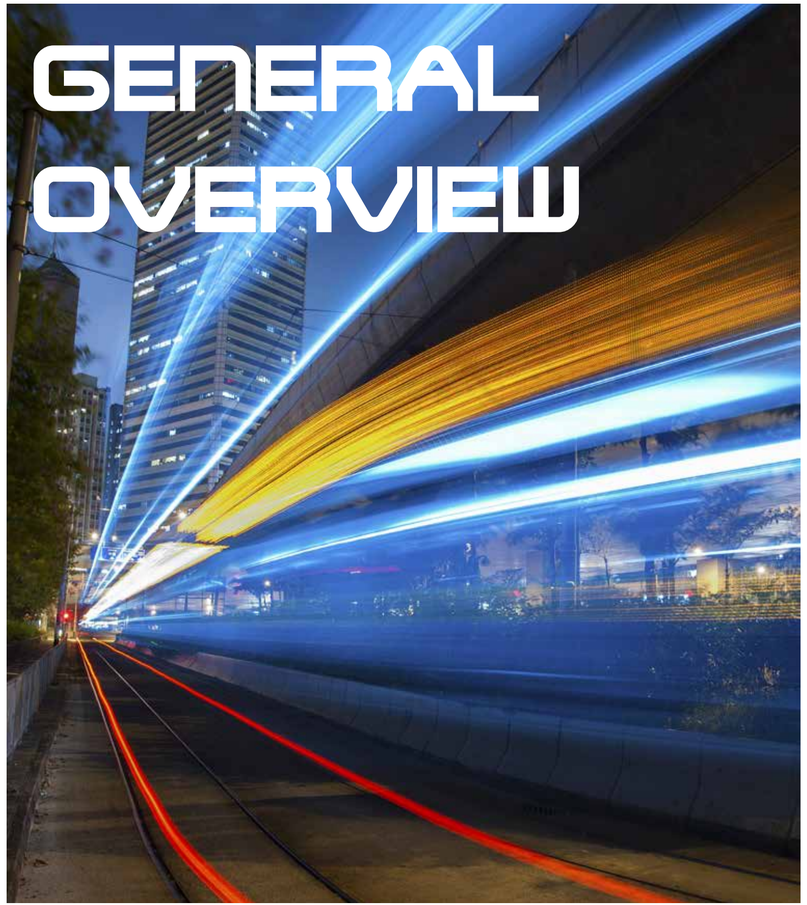

Reserve Power Solutions

FIAMM

FIAMM.COM

LEAD ACID BATTERIES COLOR CODE

SSLA GEL AGM VENT



Renewable Energy



Light Traction



Leisure



Security System & Emergency Lighting



UPS & Data Centre



Utilities & Industry



Oil & Gas



Railway



Telecom

DESIGN LIFE

FG
Standard Commercial 1.2 - 70 Ah

FGC
Cyclic 12 - 42 Ah

FGH
High Rate 5 - 18 Ah

FGL
Long Life 17 - 205 Ah

FGHL
High Rate, Long Life 5 - 11 Ah

FLB
High Rate and Long Life
100 - 700 Wpc

FIT
Front Terminal and Very Long Life 40 - 195 Ah

SLA
Top Terminal and Very Long Life 24 - 2000 Ah

SD-SDH
High Rate and Flat Plate 80 - 2320 Ah

RES
Residential Energy Solution
6.2 - 12.5 kWh

SMG
GEL Tubular Plate OPzV 100 - 3640 Ah

SMG S
GEL Tubular Plate
265 - 4240 Ah

LM S
Vented Tubular Plate
150 - 5000 Ah

LM
Tubular Plate OPzS 100 - 3500 Ah

FHT
High Temp, Front Terminal
95 - 180 Ah

SGL-SGH
Pure Lead Planté Plate GRoE 79 - 2860 Ah

FIAMM Energy Techology reserves the right to change or revise without notice any information or detail given in this publication. General_folder_10_2018